


- Temperature in °C, °F or K.
- 1- or 2-point calibration of each channel to any known temperature
- Data-logging up to 18000 data sets
- On screen help in 4 languages
- Hold function
- Automatic sequential view of all channels and allows to send the measurements simultaneously to a printer or computer
- Individual high/low limits for each channel
- 2 relays that can close or open upon the following events:
 - Alarm
 - Low alarm
 - High alarm
 - Measurement active
 - Measurement inactive
 - Stand-by
- Automatic continuing after a power failure
- GPL report
- Galvanic isolated USB interface
- Free software

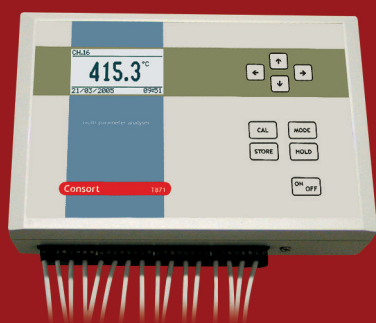

T8710 and T8720 each has it's own speciality:

T8710 can use up to 16 thermocouples (J,K,T and E type), ideal for long distance measurements requiring a short response time with a reasonable accuracy.

T8720 can use up to 12 Pt100 probes, ideal for highly accurate measurements at short or medium distances

Various features are provided in each instrument. Both USB and RS232 are provided for communication with a PC or printer.

T8710

Measurement Channels	16
Type J	-200...900°C
Type K	-200...1370°C
Type T	-200...600°C
Type E	0...1000°C

T8720

Measurement Channels Pt100	12
	-200...850°C

Warranty
Made in Belgium

36 months

Code	Description
T8710	thermometer includes USB cable
T8720	thermometer includes USB cable
A4800	wall mounting kit (optional)
AP414	serial printer
T3002K	roll of type-K wire, 100 m, PVC
T3012K	roll of type-K wire, 100 m, teflon
T3022K	roll of type-K wire, 100 m, fibre
T4420	3-wire Pt100 temperature probe with 20 m cable
T4422	3-wire Pt100 temperature probe with 2 m cable for high temperature



Artistic in science

Consort bvba
Parklaan 36
B-2300 Turnhout
Belgium

Telephone [\(+32\) \(0\)14 41 12 79](tel:+322014411279)
Email info@consort.be
Sales sales@consort.be
Support support@consort.be
Website www.consort.be